


Sandwich Maker Company

FB-1

The PVC composite boards

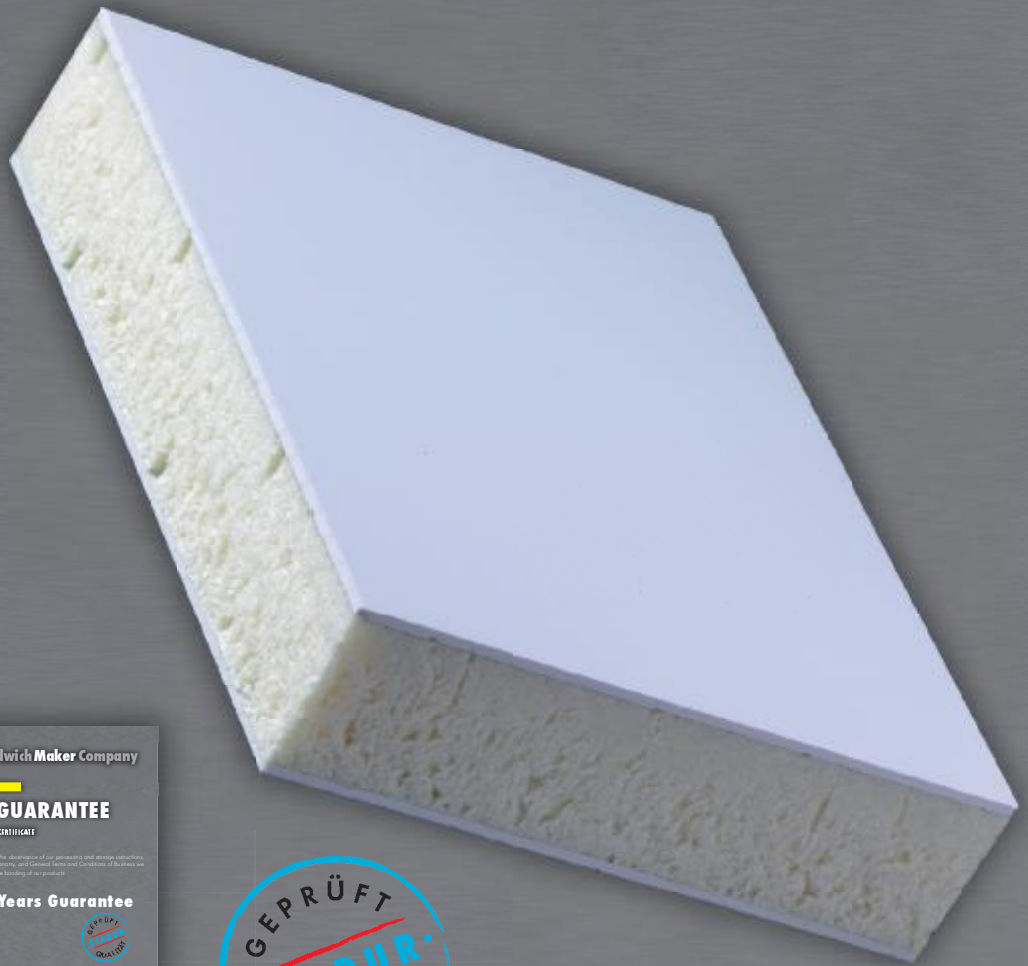

Product Information

Stadur Composite Elements FB-1



Description:

FB-1 composite elements consist of an extruded polystyrene core and hard-PVC facings on both sides of 1.0 mm, 1.5 mm or 2.0 mm thickness. The composite element is covered with a protective foil on both sides.
10 years Stadur guarantee



Properties:

- very good thermal insulation
- UV-resistant (5 years manufacturer's guarantee for the PVC facings)
- high impact resistance
- easy to process with the usual wood and metal working tools



Facings:

Hard-PVC compact panels on both sides, 1.0 mm, 1.5 mm or 2.0 mm
Standard colour: White similar to RAL 9016 brilliant or satined
Please refer to the current price list for valid formats and thicknesses of each colour.



Core Material:

Extruded polystyrene foam, CFC-free or CO₂ foamed, low vapour permeability, lowest water absorbance, B1 in accordance with DIN 4102. The foam core is corrugated for optimum adhesion. No dust release during processing. Core material of different thermal conductivity λ_D -value 0.029 – 0.035 is available.



Overall Thickness:

24 mm
Further thicknesses (thicker / thinner) of the facing layers or the foam core available on request.



Formats:

2000 x 1000 mm 3000 x 2000 mm
3000 x 1500 mm 4000 x 2000 mm
Other formats and fixed formats are available on request.



Technical Data:

| Overall Thickness | Facings | U-Value (λ_D 0.029) | U-Value (λ_D 0.035) |
|-------------------|---------|------------------------------|------------------------------|
| 24 mm | 1.0 mm | 1.06 | 1.23 |
| 24 mm | 1.5 mm | 1.10 | 1.29 |

Other thicknesses and versions available on request



Special Elements:

Stadur FB-1 composite elements can be supplied with optimised sound insulation values by incorporating special sound insulation panels or with intrusion-inhibiting aluminium inserts. Edge jointing inserts of wood, plastic or aluminium and edge finishing of the foam core as a stepped rebate or tongue and groove are possible. Other core materials, e.g. polyurethane foam, mineral wool or honeycomb construction materials are available on request.



Note:

Due to the thermoplastic material properties of PVC we advise against the use of coloured facings for outdoor use. In the case of subsequently painted elements for which Stadur has given no written release any claim under the guarantee is void. Due to considerably better sound insulation values and a clearly quieter element we recommend the use of 2.0 mm facing layers. When solvent-based substances are employed, polyurethane foam must be used as the core. For further information please refer to our brochure: *Processing Instructions*



Areas of Application:

| | | | |
|-----------------|------------------------|-------------------|-------------------------|
| Window panels | Parapet elements | Partition walls | Exhibition construction |
| Door panels | Container construction | Balcony cladding | Boat and yacht building |
| Facade elements | Refrigeration rooms | Advertising signs | |